

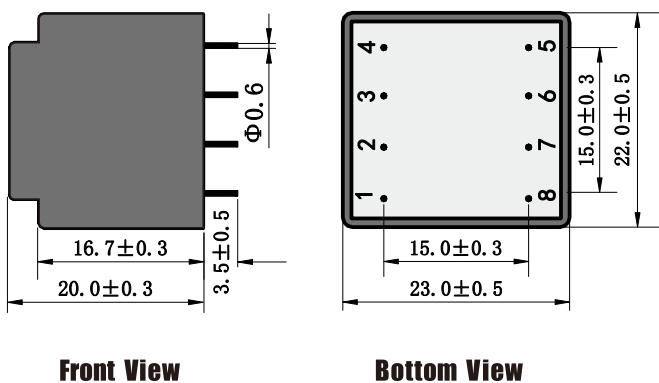
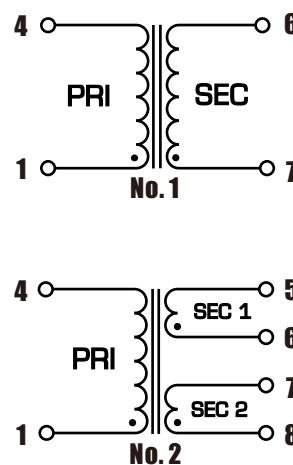
Power: 0.6VA
Core: EE20/10.5
ta 50°C
Weight: 35g
Features

- **Input 230V 50/60Hz**
- **Safety Isolating transformer**
- **Inherently Short-circuit Proof**
- **130°C Class B Insulation**
- **Two Chambers Winding Design**
- **Dielectric Strength 4,500Vrms**
- **UL 94V0 Material**
- **Vacuum Potting**
- **Customer Design**
- **OEM & Subcontracting**

Part Number	Primary (V)	Secondary (V)	Secondary (mA)	No-Load Voltage (V)	Schematic No.
YZ20S60-0405B	230	4	150.0	7.0	1
YZ20S60-0605B	230	6	100.0	10.5	1
YZ20S60-0905B	230	9	66.7	16.0	1
YZ20S60-1205B	230	12	50.0	21.0	1
YZ20S60-1505B	230	15	40.0	26.3	1
YZ20S60-1805B	230	18	33.3	31.5	1
YZ20S60-2405B	230	24	25.0	42.0	1
YZ20D60-0605B	230	2x6	2x50.0	2x10.5	2
YZ20D60-0905B	230	2x9	2x33.4	2x16.0	2
YZ20D60-1205B	230	2x12	2x25.0	2x21.0	2
YZ20D60-1505B	230	2x15	2x20.0	2x26.3	2
YZ20D60-1805B	230	2x18	2x16.7	2x31.5	2
YZ20D60-2405B	230	2x24	2x12.5	2x42.0	2

Packing Information

Model	EE20/10.5 Series
Carton size LxWxH (mm)	565X195X140
QTY Pcs/carton	360
Weight per carton	14.1kg


Dimensions (in mm)

Schematics & Pin Connections

Safety Standard
